




DC/DC

TDG-210DG

4921220011E

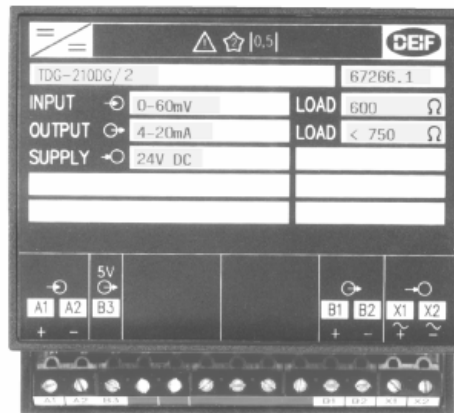

DEIF A/S

- $4 \dots 20$, $-10 \dots 0 \dots +10$) (,
-
- $24 \dots 220$ (DC) : $57,7 \dots 440$ (AC)
- DIN



(, - 10 ... 0 ... + 10 4 ... 20 (DC))

(, 0 ... 1 0 ... 10)


(, 10 ... 20 0 ... 10)

4 ... 20

(0 ... 60)

. TDG-210DG

500 (DC).

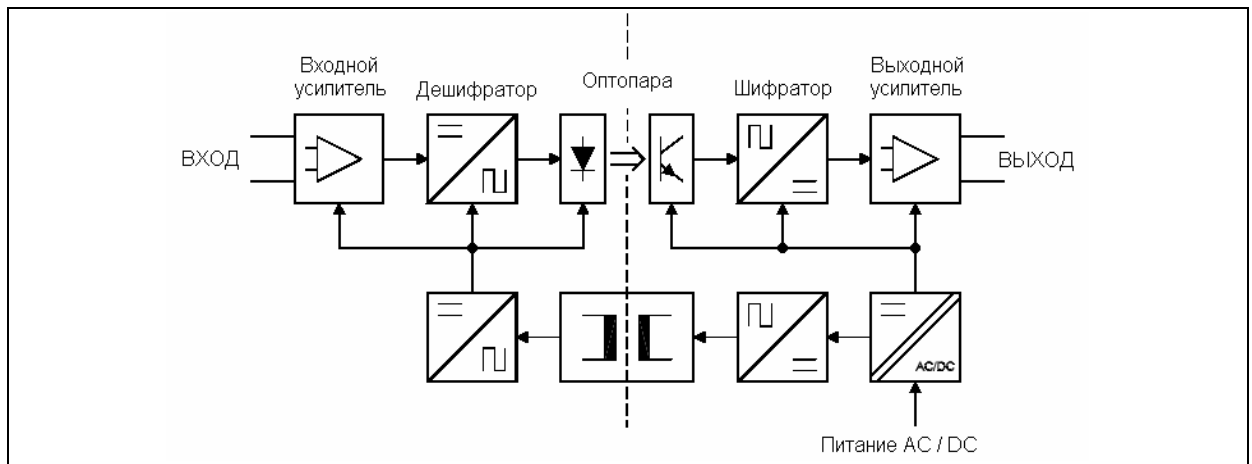




TDG-210DG

24 / 48 / 110 / 220

(DC/DC).

		0 ... 1	0,2 ... 1	0 ... 0,5 ... 1	- 1 ... 0 ... 1
		0 ... 5	1 ... 5	0 ... 2,5 ... 5	- 5 ... 0 ... 5
		0 ... 10	2 ... 10	0 ... 5 ... 10	- 10 ... 0 ... 10
		0 ... 20	4 ... 20	0 ... 10 ... 20	- 20 ... 0 ... 20
	- .	0 ... 0,1	0,02 ... 0,1	0 ... 0,05 ... 0,1	- 0,1 ... 0 ... 0,1
	- . ¹⁾	0 ... 50	10 ... 50	0 ... 25 ... 50	- 50 ... 0 ... 50
		0 ... 1			
		0 ... 1	0,2 ... 1	0 ... 0,5 ... 1	- 1 ... 0 ... 1
		0 ... 10	2 ... 10	0 ... 5 ... 10	- 10 ... 0 ... 10
	- .	0 ... 60	12 ... 60	0 ... 30 ... 60	- 60 ... 0 ... 60
	- . ¹⁾	0 ... 400	80 ... 400	0 ... 200 ... 400	- 400 ... 0 ... 400
		0 ... 0,1 (10 /)			
		0 ... 50 / 10			
		(.)			
		15 / ± 15			
		200%			
		(25)			
		(.)			
		20 / ± 15			
		150%			
		(45)			
()		0,5% , 688			
	.	< 10 , 688			
		(.)			
	-	2500 (AC) – 50 – 1 . / / . -			
		600 (AC) – 50 – 850 (DC). / / . -			
	(AC) ± 20%; 45 ... 65	57,7 – 63,5 – 100 – 110 – 120 – 127 – 220 – 240 – 380 – 400 – 415 – 440 (AC) (3,5)			
	(DC) – 20% / + 30%	24 – 48 – 110 – 220 (DC) (2,5), DC / DC			
		-10...55°C (), - C (), - C ().			
		HSE, DIN 40040			
(EMC)		EN 50081-1/2, EN 50082-1/2, SS436 1503 (PL4) 255-22-1 (3)			
		° IP53; IP20, 688			
/		0,5 (-10 ... 15 ... 30 ... 55°C), 688			
		0,2% 10°C; 0,15% 10°C			
/ .		0,1%			
.		0,1% 10%			
		2,5 ² 4 ²			
		, UL94 (V0)			

1)

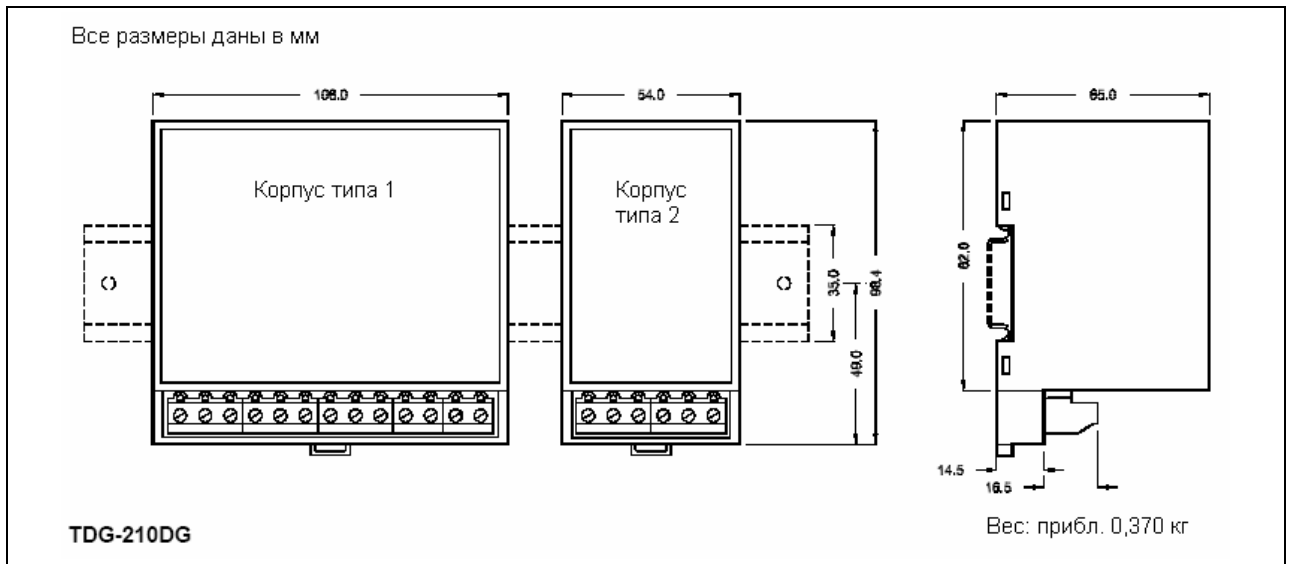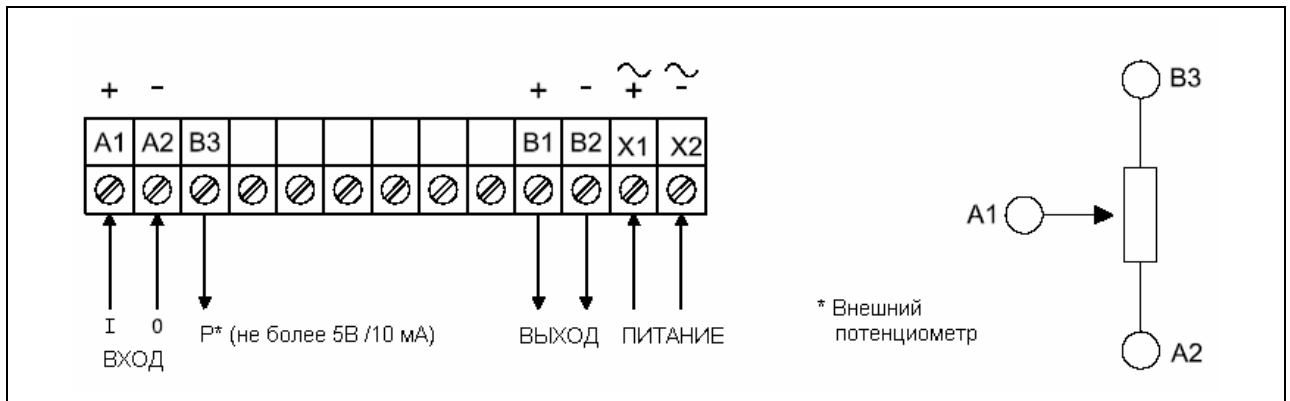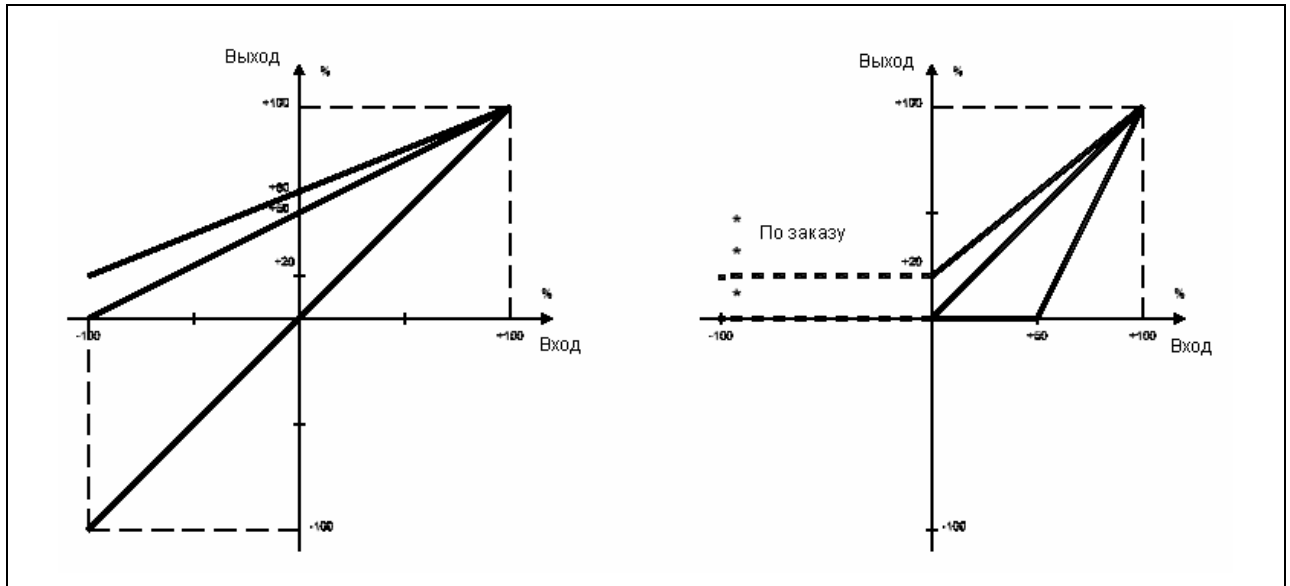

DEIF A/S, Frisenborgvej 33
 DK-7800 Skive, Denmark
 Tel.: +45 9614 9614, Fax: +45 9614 9615
 E-mail: deif@deif.com, URL: www.deif.com

